

FUMEFLUX TOPGRADE

STAINLESS STEEL HIGH TEMPERATURE NOZZLE

Engineered for durability, precision, and high-temperature performance, the FumeFlux TopGrade is built from premium stainless steel, making it a reliable solution for even the most demanding environments. Rated for continuous use at temperatures up to 2100°F (1100°C), it delivers exceptional resistance to heat, corrosion, and wear.

Available in 100, 125, 150, 200, 250 and 300 mm diameter, the FumeFlux TopGrade is versatile enough for a wide range of applications, especially in maintenance facilities handling large vehicles such as buses, trucks, and heavy machinery. Enhance performance with optional grid or vise grip attachments for secure, precise fume capture. For maximum efficiency, pair it seamlessly with a Plymovent hose reel or rail system.



APPLICATIONS

The FumeFlux TopGrade is intended to be used for the following applications:




- To eliminate hazardous vehicle exhaust emissions in combination with our vehicle exhaust capture and removal systems.

SPECIFICATIONS

Physical properties	
Material	Stainless steel
Color	Silver
Dimensions (L×W×H)	refer to table dimensions & weights
Net weight	refer to table dimensions & weights
Ambient conditions	
Operating conditions	up to 1100°C Relative humidity max. 90%
Storage conditions	5-45°C (41-113°F) Relative humidity max. 90%
Suitable for outdoor use	No
Where used	
High temperature vehicle exhaust	
Scope of supply	
FumeFlux nozzle	
Options & accessories	
ViseGrip SC-90 Grid Stack adapter	
Product combinations	
All Plymovent hoses	
Order information	
Article no.	refer to order information
Number/package	1
Shipping data	
Country of origin	Thailand
Harmonized Tariff Code	84219990

DIMENSIONS & WEIGHTS

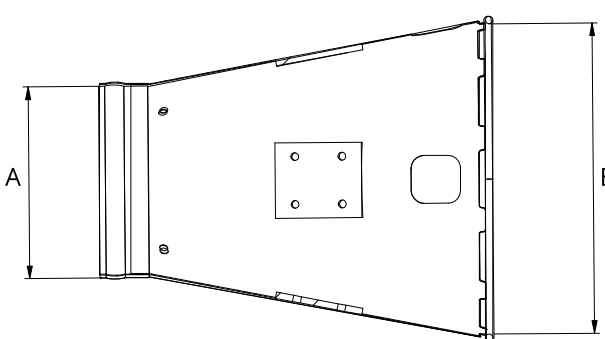

	A (mm)	B (mm)	C (mm)	Weight (kg)
FumeFlux-4	100	150	260	1,15
FumeFlux-5	125	205	265	1,3
FumeFlux-6	150	255	315	1,5
FumeFlux-8	200	307	370	2
FumeFlux-10	250	355	450	2,75
FumeFlux-12	300	400		3,5

APPROVALS & CERTIFICATES

CE Machine Directive 2006/42/EU / UKCA Supply of Machinery (Safety) Regulations 2008



ORDER INFORMATION

						Order information	Weight (kg)
		ViseGrip 0000350194	SC-90 0000000000	Grid	Stack adapter 0000000000	FumeFlux Grids	
	FumeFlux-4 TopGrade 0000350179	✓	✓	✓	✓	FumeFlux Grid-4 0000350253	0,25
	FumeFlux-5 TopGrade 0000350168	✓	✓	✓	✓	FumeFlux Grid-4 0000350253	0,3
	FumeFlux-6 TopGrade 0000350165	✓	✓	✓	✓	FumeFlux Grid-4 0000350253	0,35
	FumeFlux-8 TopGrade 0000350157	✓	✓	✓	✓	FumeFlux Grid-4 0000350253	0,4
	FumeFlux-10 TopGrade 0000306628	✓	✓	✓	✓	FumeFlux Grid-4 0000350253	0,45
	FumeFlux-12 TopGrade 0000306632	✓	✓	✓	✓	FumeFlux Grid-4 0000350253	0,5

Disclaimer

All reasonable measures have been taken to ensure the information is accurate and current. However, Plymovent cannot accept any liability for the accuracy or content of material in this document. Plymovent may change, delete or add information without notice. Please visit www.plymovent.com to make sure you are using the most recent version.

Product

FumeFlux series

Article no.

Refer to order information

Product category

Nozzles and grabbers

Version

A

Always check the latest version on www.plymovent.com